

BRAND IDENTITY



EV CHARGING POINTS MANUAL

External signage



Icon code 119d

Application:


- I Optional, unless required by local regulations

Specifications:

- I Panel:
 - I Panel pictogram (180x180mm) on plate (160x160x10mm) RAL9005 jet black
 - I Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
 - I Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue
 - I Signage cut out of blue film
- I Dimensions:
 - I Height = 180mm
 - I Width = 180mm
- I Q-drawings:
 - I Q.03.1 Entrance portal U-shape
 - I Q.04.1 Entrance portal L-shape
 - I Q.05.1 Name indication facade



Entrance portal U-shape

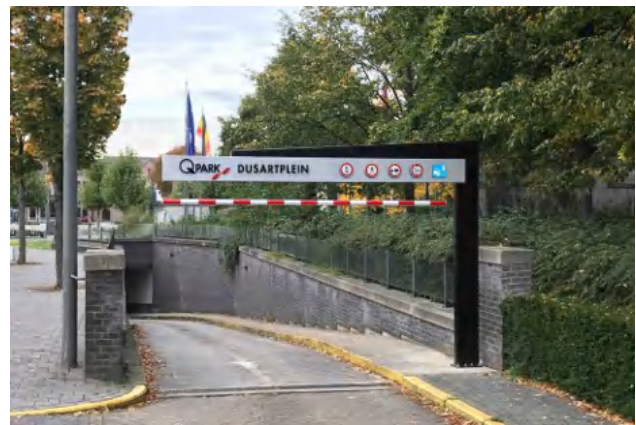


Entrance portal L-shape



Name indication facade

Internal signage routing

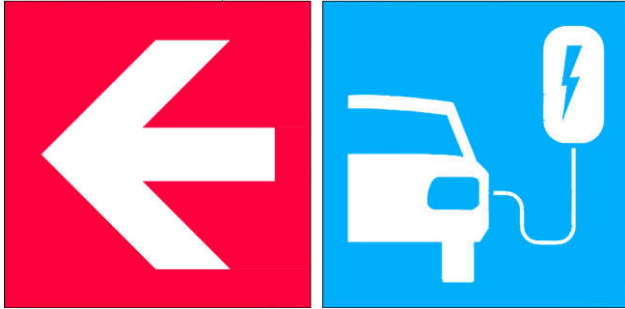

Application:

- Signage on the route to EV charging, only mounted at key decision points (EV charging sign in blue film)

Specifications:

- Panel:
 - Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
 - Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
 - Film on plate:
 - 3M 3630-43 Light tomato red (for arrow sign)
 - 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (for EV charging sign)
 - Signage cut out of red and blue film
- Dimensions:
 - Height = 300mm
 - Width = 300mm
- Q-drawings:
 - Q.30.1 Position of signage
 - Q.32.A Signage, suspended
 - Q.32.B Signage, mounting on ceiling

