

BRAND IDENTITY



Internal signage at EV charging points



Front and rear equal sign, double-sided (see also floor plan)



Application:

- | Signage EV charging suspended perpendicular to driving aisle for visibility
 - | Position aligned with front of parking space at heart of a single space
- | EV charging device (wall mounted), colour reference neutral light colour
 - | Position always between parking spaces and never at heart of a single space
 - | Bottom of EV charging device at 800mm+floor
 - | Power supply via ceiling

Specifications:

- | Panel:
 - | Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
 - | Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt (double-sided)
 - | Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (double-sided)
 - | Signage cut out of blue film
- | Dimensions:
 - | Height = 300mm
 - | Width = 300mm
- | Q-drawings:

- | Q.32.A Signage, suspended
- | Q.32.B Signage, mounting on ceiling

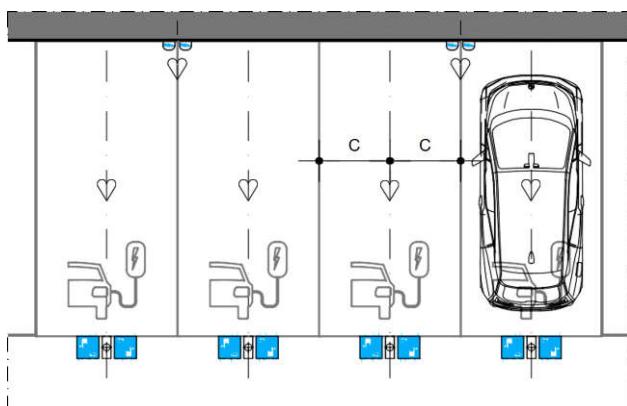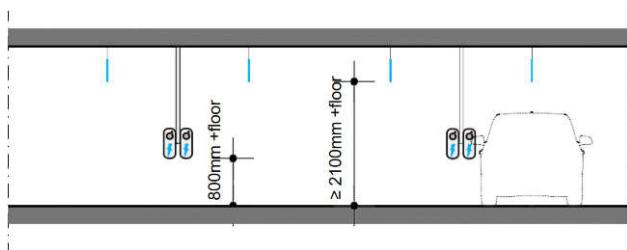

Floor plan

Internal signage at EV charging points (A1-frame)



Application:

- | A1-frame (wall mounted) for communication EV charging
- | Position always between parking spaces and never at heart of a single space
- | Minimal 1x A1-frame per 4 CPs where CPs are located

Specifications:

- | A1-poster:
 - | Poster size: height x width = 832 x 593mm
 - | Poster layout: CPO branded & mandatory information:
 - | Clear CP usage instructions (start/stop session, unplug etc.)


- | CPO customer help desk phone number and e-mail
- | Tariff information reference (where to find charging tariffs?)
- | Location of the specific charge point ID (reference number)
- | Explain functionalities (indicator/display colours)
- | Optional subtle co-branding with Q-Park (not preferred)

Dimensions A1-frame:


- | Height = 924mm
- | Width = 690mm

Q-drawings:

- | Q.33.B Signage A1-frame, wall fastening

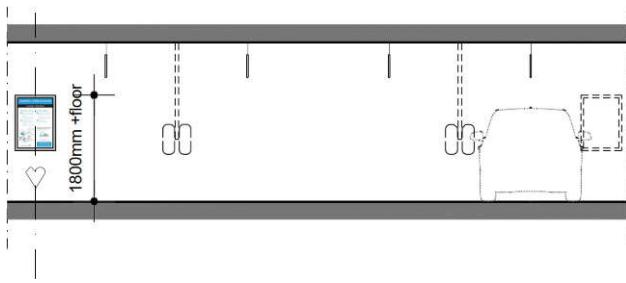


Section

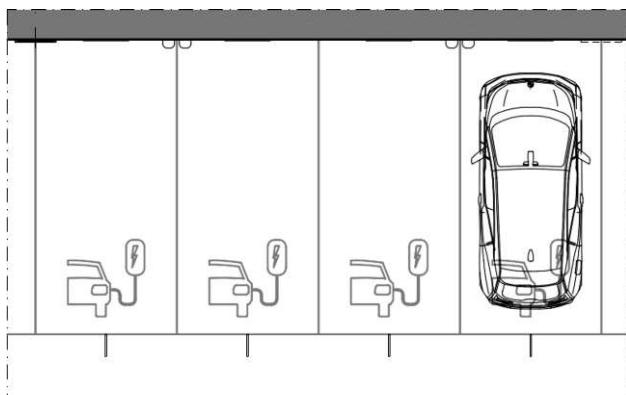

Floor plan

Internal signage at EV charging points (optional signage)

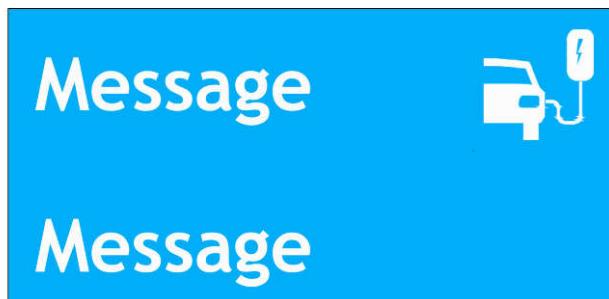

Example




Example



- | Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
- | Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue
- | Signage cut out of blue film
- | Dimensions:
 - | Height = 300mm
 - | Width = 610mm
- | Q-drawings:
 - | Q.33.A Signage, wall fastening



Example

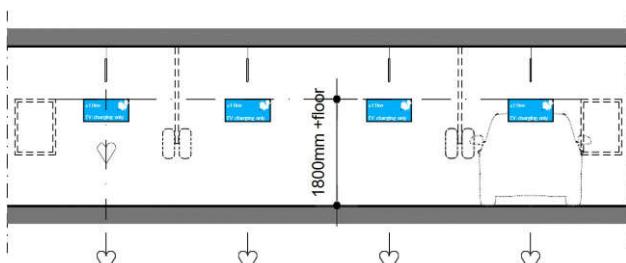


Application:

- | Only applicable in case legally binding message is needed
- | In order to distinct regular CPs (AC<11kW) with fast CPs (DC>22kW) where applicable
- | Sign preferably wall mounted (top of sign = top of A1-frame)
- | Position always at heart of the EV charging space
- | 1 sign per parking space

Specifications:

- | Panel:
 - | Panel (single-sided) glued on 18mm WBP plywood
 - | At lateral side and joints plywood painted RAL9005 jet black

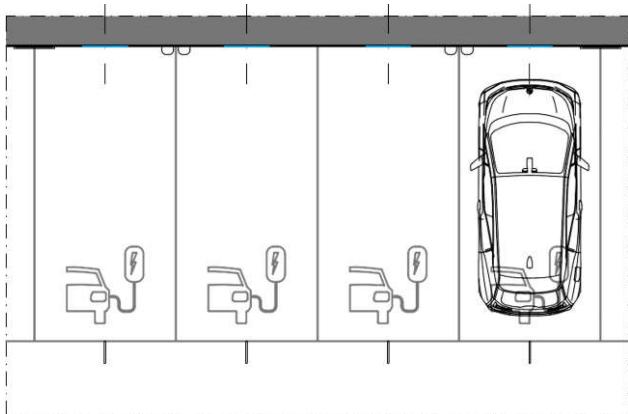

Floor plan

Floor markings at EV charging points

Standard

