
CONTENTS

BRAND IDENTITY	5
Brand voice & Tone of voice	6
Effective communication is crucial	7
VISUAL IDENTITY	8
Logo	8
Colour	17
Typography	24
Icons	26
Programme logos	27
REAL ESTATE	28
House style manual	28
Customer Guiding System	36
Partnership signage	50
EV-charging points manual	55
Mobility Hub signage manual	62
A1 frames	94
STATIONARY	96
Digital stationary	96
Printed stationary	98
COMMUNICATIONS	103
Guidelines	103
Conventions for visuals and the logo	113
Tone of voice and Writing guidelines	114
Corporate English style guide	121
Tools	128
Marketing Communications Code	130
Tone of voice	131
PR	132
Press / Media protocol	132
Guidelines	134
PHOTOGRAPHY	138
APPENDICES	156
GLOSSARY	161

Internal signage at EV-charging points



Front and rear equal sign, double-sided (see also floorplan)

Application:



- I Signage EV-charging suspended perpendicular to driving aisle for visibility
 - I Position aligned with front of parking space at heart of a single space
- I EV-charging device (wall mounted), colour reference neutral light colour
 - I Position always between parking spaces and never at heart of a single space
 - I Bottom of EV-charging device at 800mm+floor
 - I Power supply via ceiling

Specifications:


- I Panel:
 - I Panel (double-sided) glued on 18mm wbp plywood, at lateral side & joints plywood painted RAL9005 jet black
 - I Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt (double-sided)
 - I Foil on plate: 3M 3630-57 olympic blue / Oracal 8500-53 light blue (double-sided)
 - I Signage cut out of blue foil

- I Dimensions:
 - I Height = 300mm
 - I Width = 300mm
- I Q-drawings:

- I Q.32.A Signage, suspended
- I Q.32.B Signage, mounting on ceiling

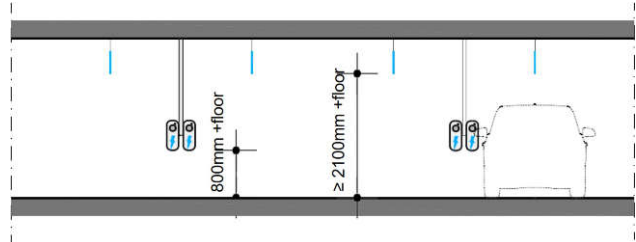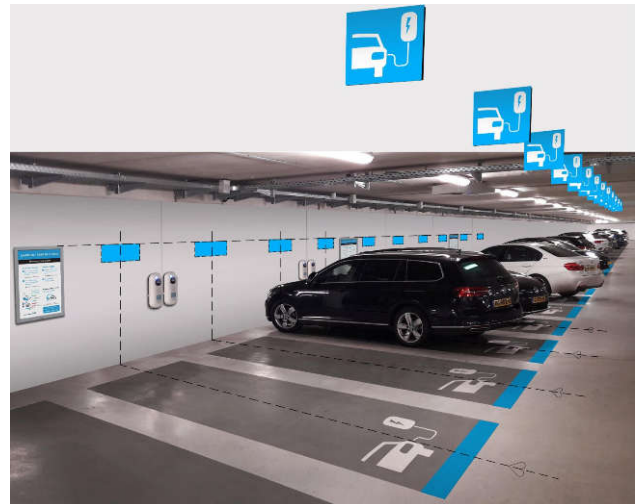

Section

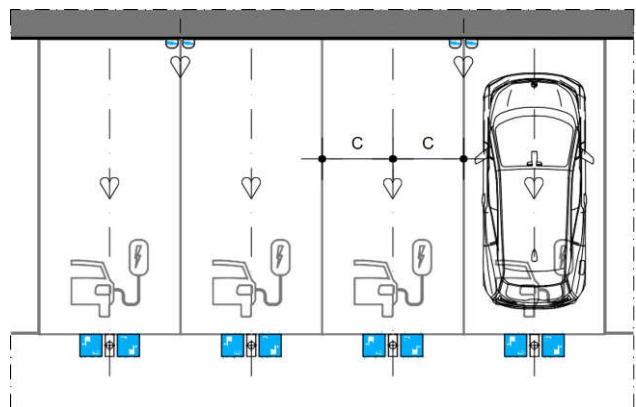

Floorplan

Internal signage at EV-charging points (A1-frame)



Application:

- | A1-frame (wall mounted) for communication EV-charging
- | Position always between parking spaces and never at heart of a single space
- | Minimal 1x A1-frame per 4 CPs where CPs are located

Specifications:

- | A1-poster:
 - | Poster size: height x width = 832 x 593mm
 - | Poster layout: CPO branded & mandatory information:
 - | Clear CP usage instructions (start/start session, unplug etc.)


- | CPO customer helpdesk phone number and e-mail
- | Tariff information reference (where to find charging tariffs?)
- | Location of the specific charge point ID (reference number)
- | Explain functionalities (indicator/display colours)
- | Optional subtle co-branding with Q-Park (not preferred)

Dimensions A1-frame:


- | Height = 924mm
- | Width = 690mm

Q-drawings:

- | Q.33.B Signage A1-frame, wall fastening

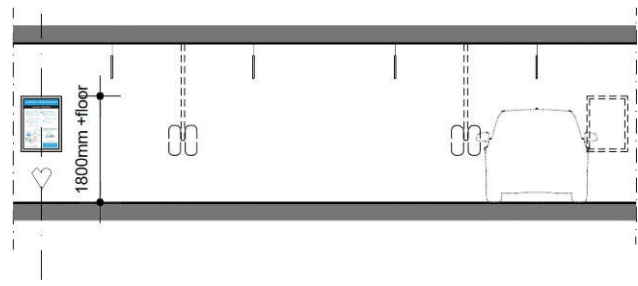


Section

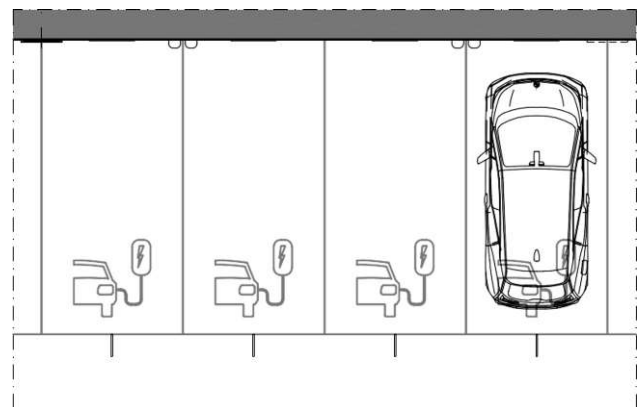


Floorplan


Internal signage at EV-charging points (optional signage)

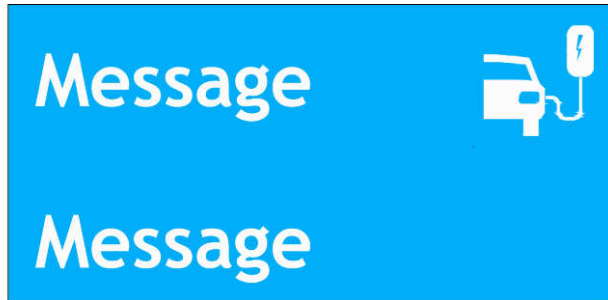

Example



Example



Example



Application:

- | Only applicable in case legally binding message is needed
- | In order to distinct regular CPs (AC < 11 kW) with fast CPs (DC > 22 kW) where applicable
- | Sign preferably wall mounted (top of sign = top of A1-frame)
- | Position always at heart of the EV-charging space
- | 1 sign per parking space

Specifications:

- | Panel:
 - | Panel (single-sided) glued on 18mm wbp plywood
 - | At lateral side and joints plywood painted RAL9005 jet black

- | Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
- | Foil on plate: 3M 3630-57 olympic blue / Oracal 8500-53 light blue
- | Signage cut out of blue foil
- | Dimensions:
 - | Height = 300mm
 - | Width = 610mm
- | Q-drawings:
 - | Q.33.A Signage, wall fastening

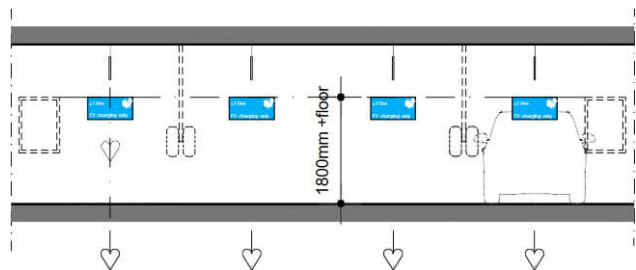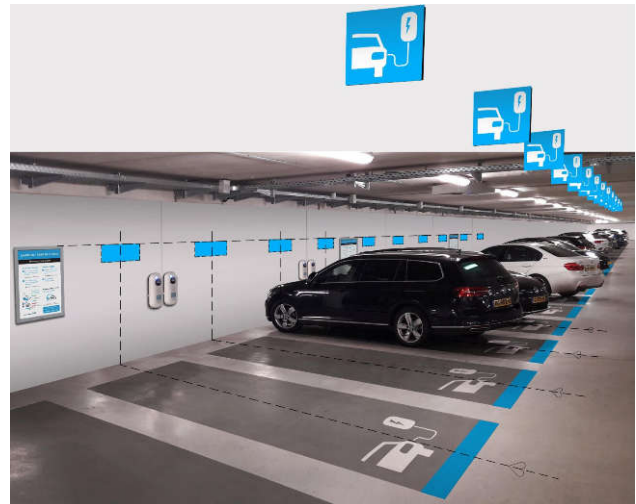

Section

