


BRAND IDENTITY



Internal signage at EV charging points



Front and rear equal sign, double-sided (see also floor plan)


Application:

- I Signage EV charging suspended perpendicular to driving aisle for visibility
 - I Position aligned with front of parking space at heart of a single space
- I EV charging device (wall mounted), colour reference neutral light colour
 - I Position always between parking spaces and never at heart of a single space
 - I Bottom of EV charging device at 800mm+floor
 - I Power supply via ceiling


Specifications:

- I Panel:
 - I Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
 - I Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt (double-sided)
 - I Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (double-sided)
 - I Signage cut out of blue film
- I Dimensions:
 - I Height = 300mm
 - I Width = 300mm
- I Q-drawings:

- I Q.32.A Signage, suspended
- I Q.32.B Signage, mounting on ceiling

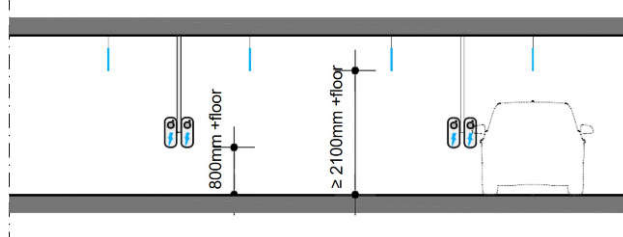

Section

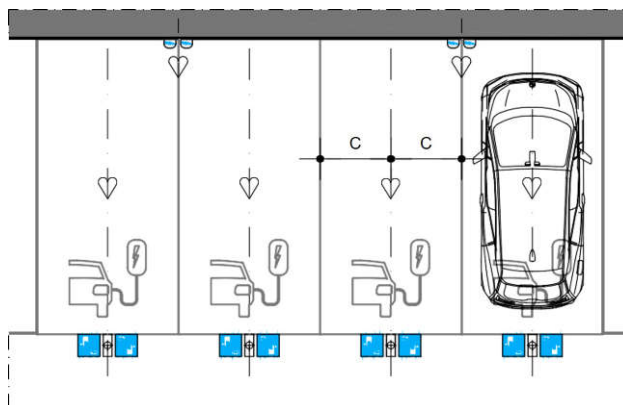

Floor plan

Internal signage at EV charging points (A1-frame)



Application:

- I A1-frame (wall mounted) for communication EV charging
- I Position always between parking spaces and never at heart of a single space
- I Minimal 1x A1-frame per 4 CPs where CPs are located

Specifications:

- I A1-poster:
 - I Poster size: height x width = 832 x 593mm
 - I Poster layout: CPO branded & mandatory information:
 - I Clear CP usage instructions (start/stop session, unplug etc.)


- I CPO customer help desk phone number and e-mail
- I Tariff information reference (where to find charging tariffs?)
- I Location of the specific charge point ID (reference number)
- I Explain functionalities (indicator/display colours)
- I Optional subtle co-branding with Q-Park (not preferred)

Dimensions A1-frame:


- I Height = 924mm
- I Width = 690mm

Q-drawings:

- I Q.33.B Signage A1-frame, wall fastening

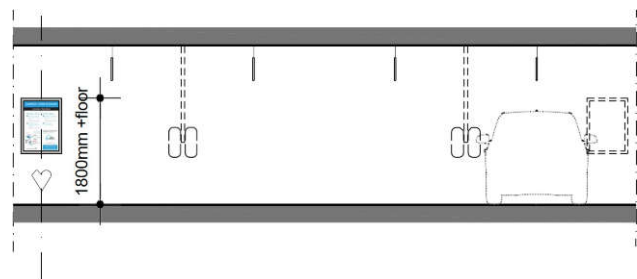


Section

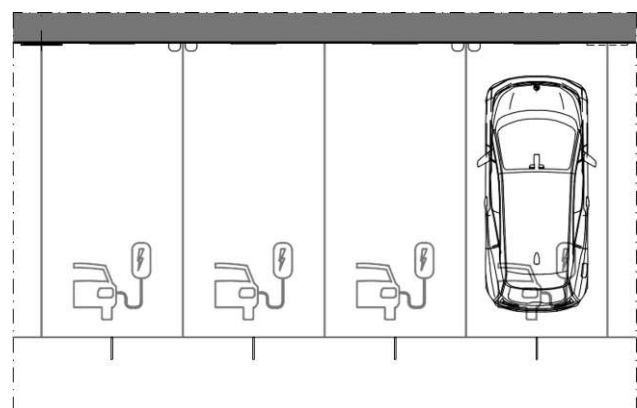


Floor plan


Internal signage at EV charging points (optional signage)

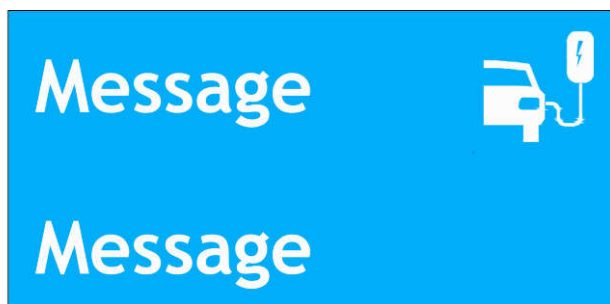

Example



Example



Example


Application:

- | Only applicable in case legally binding message is needed
- | In order to distinct regular CPs (AC<11kW) with fast CPs (DC>22kW) where applicable
- | Sign preferably wall mounted (top of sign = top of A1-frame)
- | Position always at heart of the EV charging space
- | 1 sign per parking space

Specifications:

- | Panel:
 - | Panel (single-sided) glued on 18mm WBP plywood
 - | At lateral side and joints plywood painted RAL9005 jet black

- | Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
- | Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue
- | Signage cut out of blue film
- | Dimensions:
 - | Height = 300mm
 - | Width = 610mm
- | Q-drawings:
 - | Q.33.A Signage, wall fastening

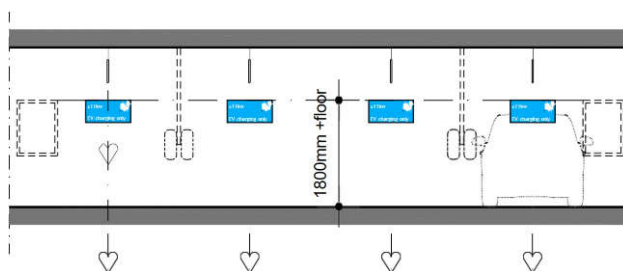

Section

