


BRAND IDENTITY



Internal signage routing

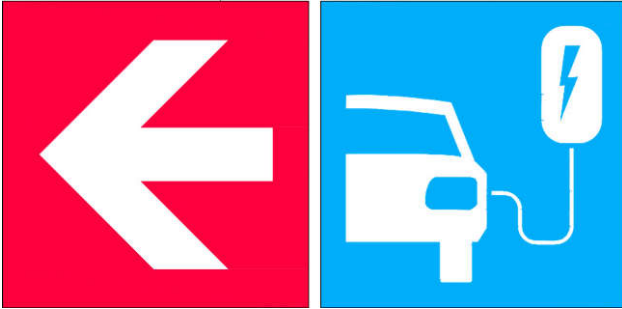


Application:


- I Signage on the route to EV charging, only mounted at key decision points (EV charging sign in blue film)

Specifications:

- I Panel:
 - I Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
 - I Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
 - I Film on plate:
 - I 3M 3630-43 Light tomato red (for arrow sign)
 - I 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (for EV charging sign)
 - I Signage cut out of red and blue film
- I Dimensions:
 - I Height = 300mm
 - I Width = 300mm
- I Q-drawings:
 - I Q.30.1 Position of signage
 - I Q.32.A Signage, suspended
 - I Q.32.B Signage, mounting on ceiling

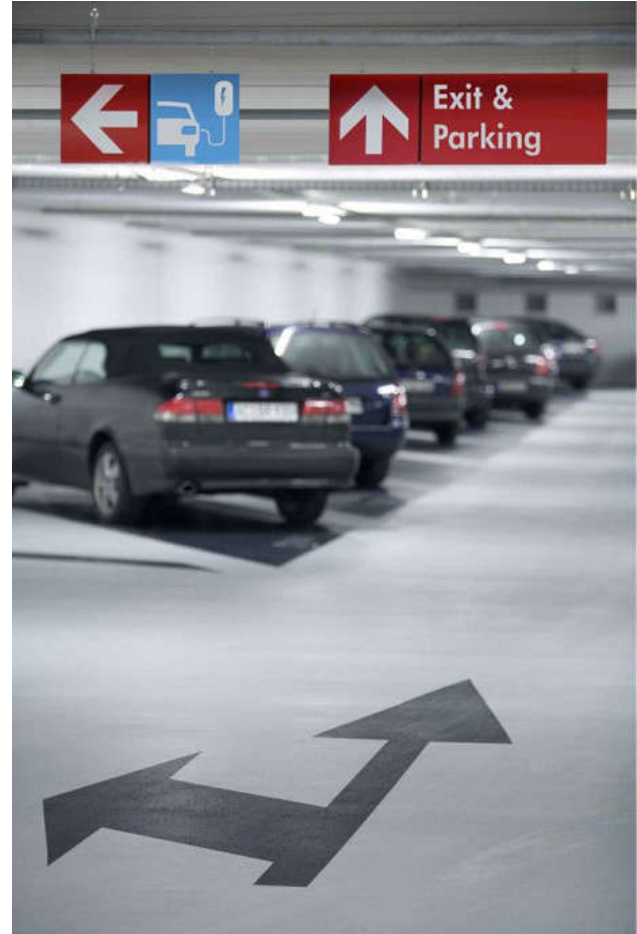

Internal signage at EV charging points



Front and rear equal sign, double-sided (see also floor plan)

Application:


- I Signage EV charging suspended perpendicular to driving aisle for visibility
 - I Position aligned with front of parking space at heart of a single space
- I EV charging device (wall mounted), colour reference neutral light colour
 - I Position always between parking spaces and never at heart of a single space
 - I Bottom of EV charging device at 800mm+floor
 - I Power supply via ceiling

Specifications:


- I Panel:
 - I Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
 - I Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt (double-sided)
 - I Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (double-sided)
 - I Signage cut out of blue film

- I Dimensions:
 - I Height = 300mm
 - I Width = 300mm
- I Q-drawings:

- I Q.32.A Signage, suspended
- I Q.32.B Signage, mounting on ceiling

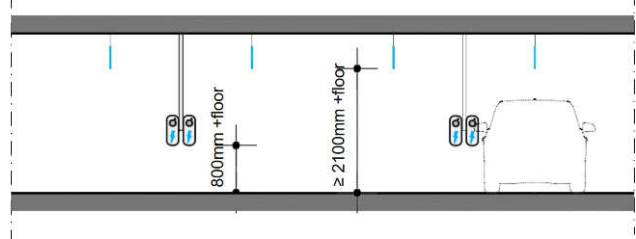

Section

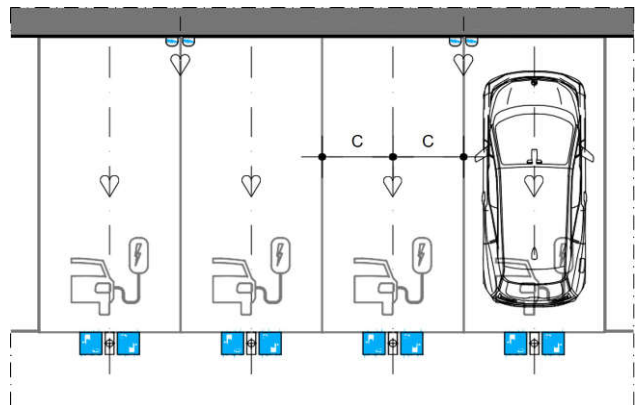

Floor plan