BRAND IDENTITY

EV CHARGING POINTS MANUAL

External signage

Icon code 119d

Application:

- Optional, unless required by local regulations

Specifications:

- Panel:
  - Panel pictogram (180x180mm) on plate (160x160x10mm) RAL9005 jet black
  - Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
  - Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue
  - Signage cut out of blue film
- Dimensions:
  - Height = 180mm
  - Width = 180mm
- Q-drawings:
  - Q.03.1 Entrance portal U-shape
  - Q.04.1 Entrance portal L-shape
  - Q.05.1 Name indication facade

Entrance portal U-shape

Entrance portal L-shape

Name indication facade

Internal signage routing

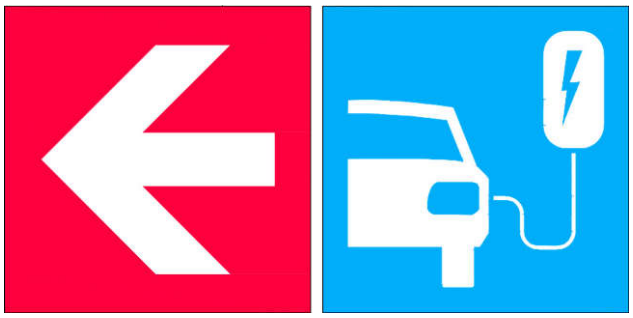

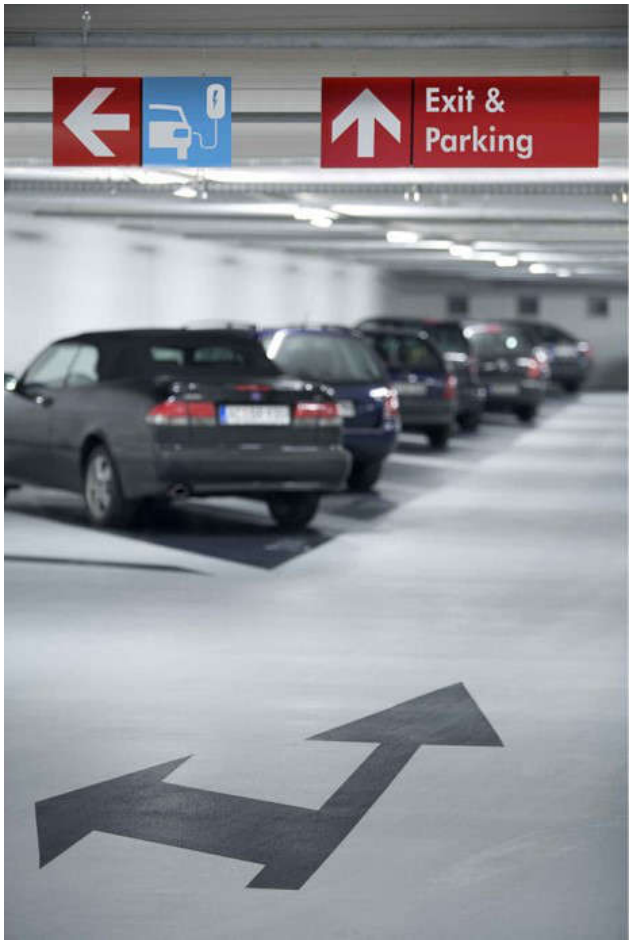

Application:

- Signage on the route to EV charging, only mounted at key decision points (EV charging sign in blue film)

Specifications:

- Panel:
  - Panel (double-sided) glued on 18mm WBP plywood,
    at lateral side & joints plywood painted RAL9005 jet black
  - Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
  - Film on plate:
    - 3M 3630-43 Light tomato red (for arrow sign)
    - 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (for EV charging sign)
  - Signage cut out of red and blue film
- Dimensions:
  - Height = 300mm
  - Width = 300mm
- Q-drawings:
  - Q.30.1 Position of signage
  - Q.32.A Signage, suspended
  - Q.32.B Signage, mounting on ceiling