BRAND IDENTITY

Internal signage routing

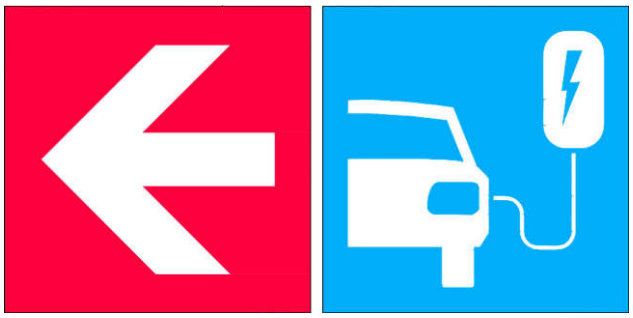

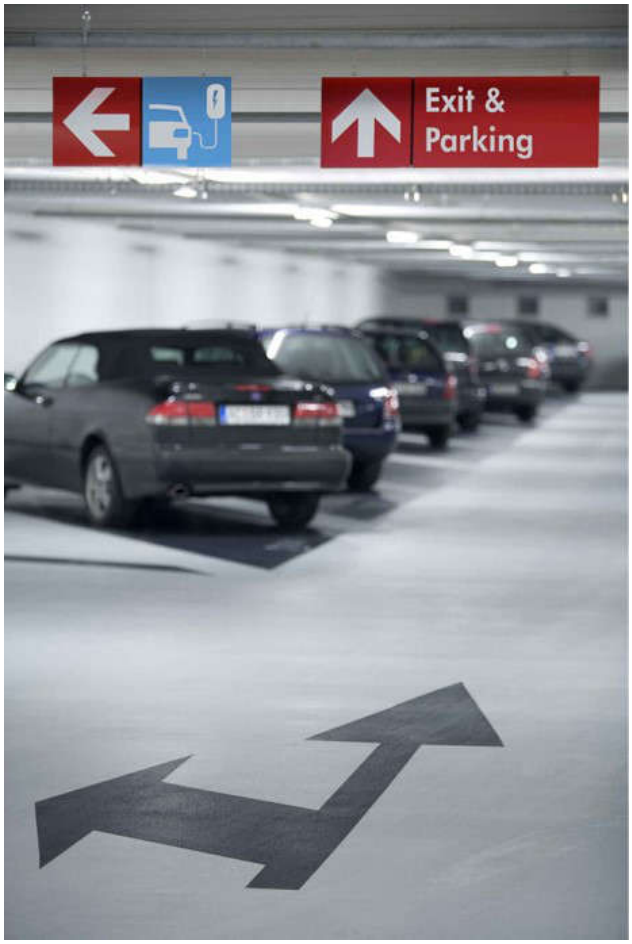

Application:

- Signage on the route to EV charging, only mounted at key decision points (EV charging sign in blue film)

Specifications:

- Panel:
  - Panel (double-sided) glued on 18mm WBP plywood,
    at lateral side & joints plywood painted RAL9005 jet black
  - Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt
  - Film on plate:
    - 3M 3630-43 Light tomato red (for arrow sign)
    - 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (for EV charging sign)
  - Signage cut out of red and blue film
- Dimensions:
  - Height = 300mm
  - Width = 300mm
- Q-drawings:
  - Q.30.1 Position of signage
  - Q.32.A Signage, suspended
  - Q.32.B Signage, mounting on ceiling

Premium

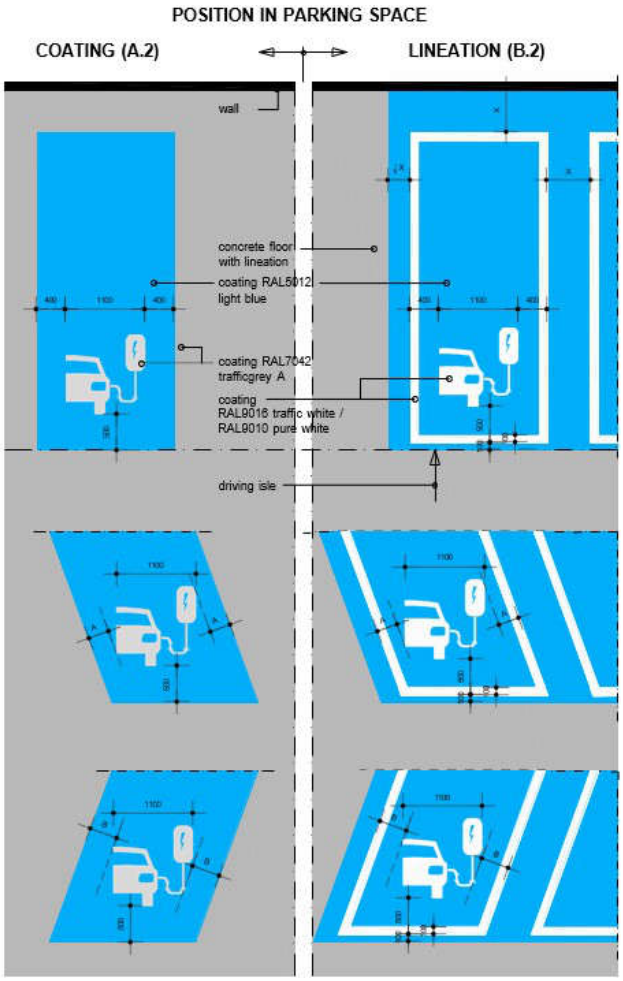

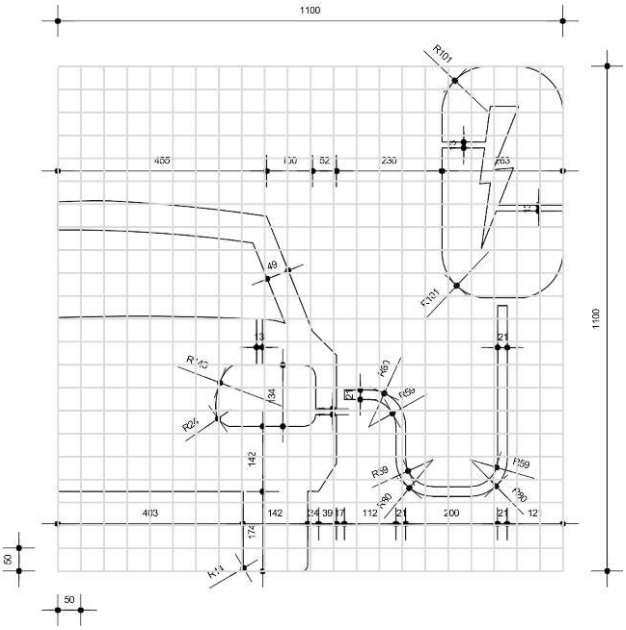

Title

Internal signage at EV charging points

Front and rear equal sign, double-sided (see also floor plan)

Application:

- Signage EV charging suspended perpendicular to driving aisle for visibility
  - Position aligned with front of parking space at heart of a single space
- EV charging device (wall mounted), colour reference neutral light colour
  - Position always between parking spaces and never at heart of a single space
  - Bottom of EV charging device at 800mm+floor
  - Power supply via ceiling

Specifications:

- Panel:
  - Panel (double-sided) glued on 18mm WBP plywood, at lateral side & joints plywood painted RAL9005 jet black
  - Dibond plate (2mm) (www.Dibond.eu), platinum white (~RAL9016) matt (double-sided)
  - Film on plate: 3M 3630-57 Olympic blue / Oracal 8500-53 light blue (double-sided)
  - Signage cut out of blue film
- Dimensions:
  - Height = 300mm
  - Width = 300mm
- Q-drawings:
  - Q.32.A Signage, suspended
  - Q.32.B Signage, mounting on ceiling

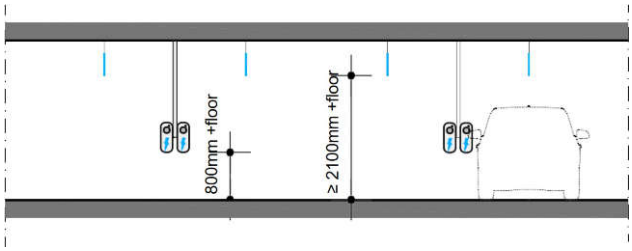

Section

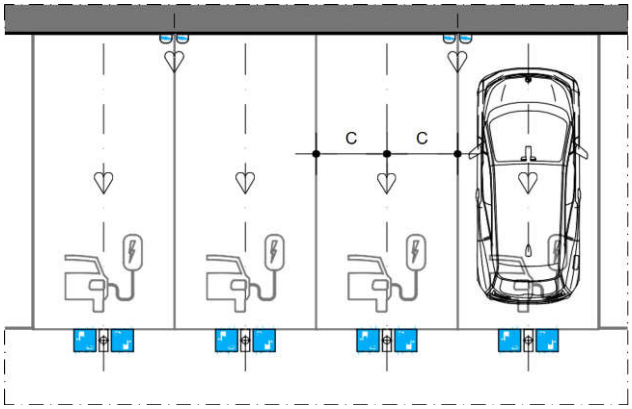

Floor plan